BTE ATTACHMENT

UNIVERSAL TAMPER

Tamp ties quickly and efficiently using a single hydraulic circuit

The **BTE Universal Tamper** streamlines tie tamping across track construction, section maintenance, and washout repair operations. A built-in rotator allows flexible positioning, and with the tamper's integrated diverter and priority valve, you only need a single hydraulic circuit. Foot pedal controls make operation easy, and BTI carbide replaceable tamping tools ensure long service life and reliable performance.

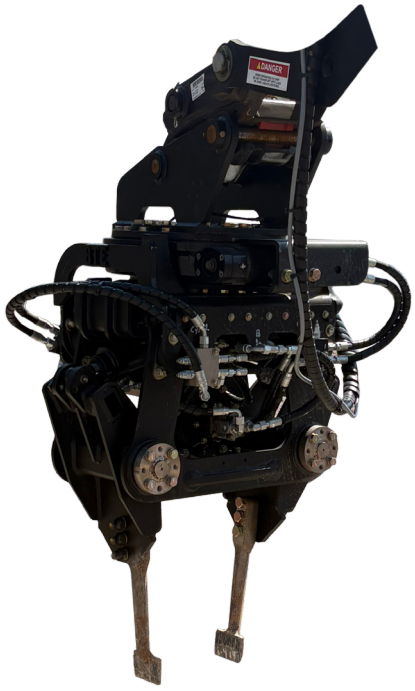

AT-A-GLANCE

Height	5 ft 4 in
Weight	1,300 lbs
Hydraulic Flow Required	9 GPM minimum
Hydraulic Pressure Required	Up to 3,000 PSI
Hydraulic Circuits Required	1

FEATURES

- Built-in rotator increases machine compatibility
- Integrated diverter enables operation on one hydraulic circuit
- Foot-pedal control eliminates need for machine modifications
- Uses BTI carbide replaceable tamping tools for extended service life

BALLAST TOOLS™
BTE
EQUIPMENT